



## Rotary hearth furnace plant with fixture rotation hardening machine

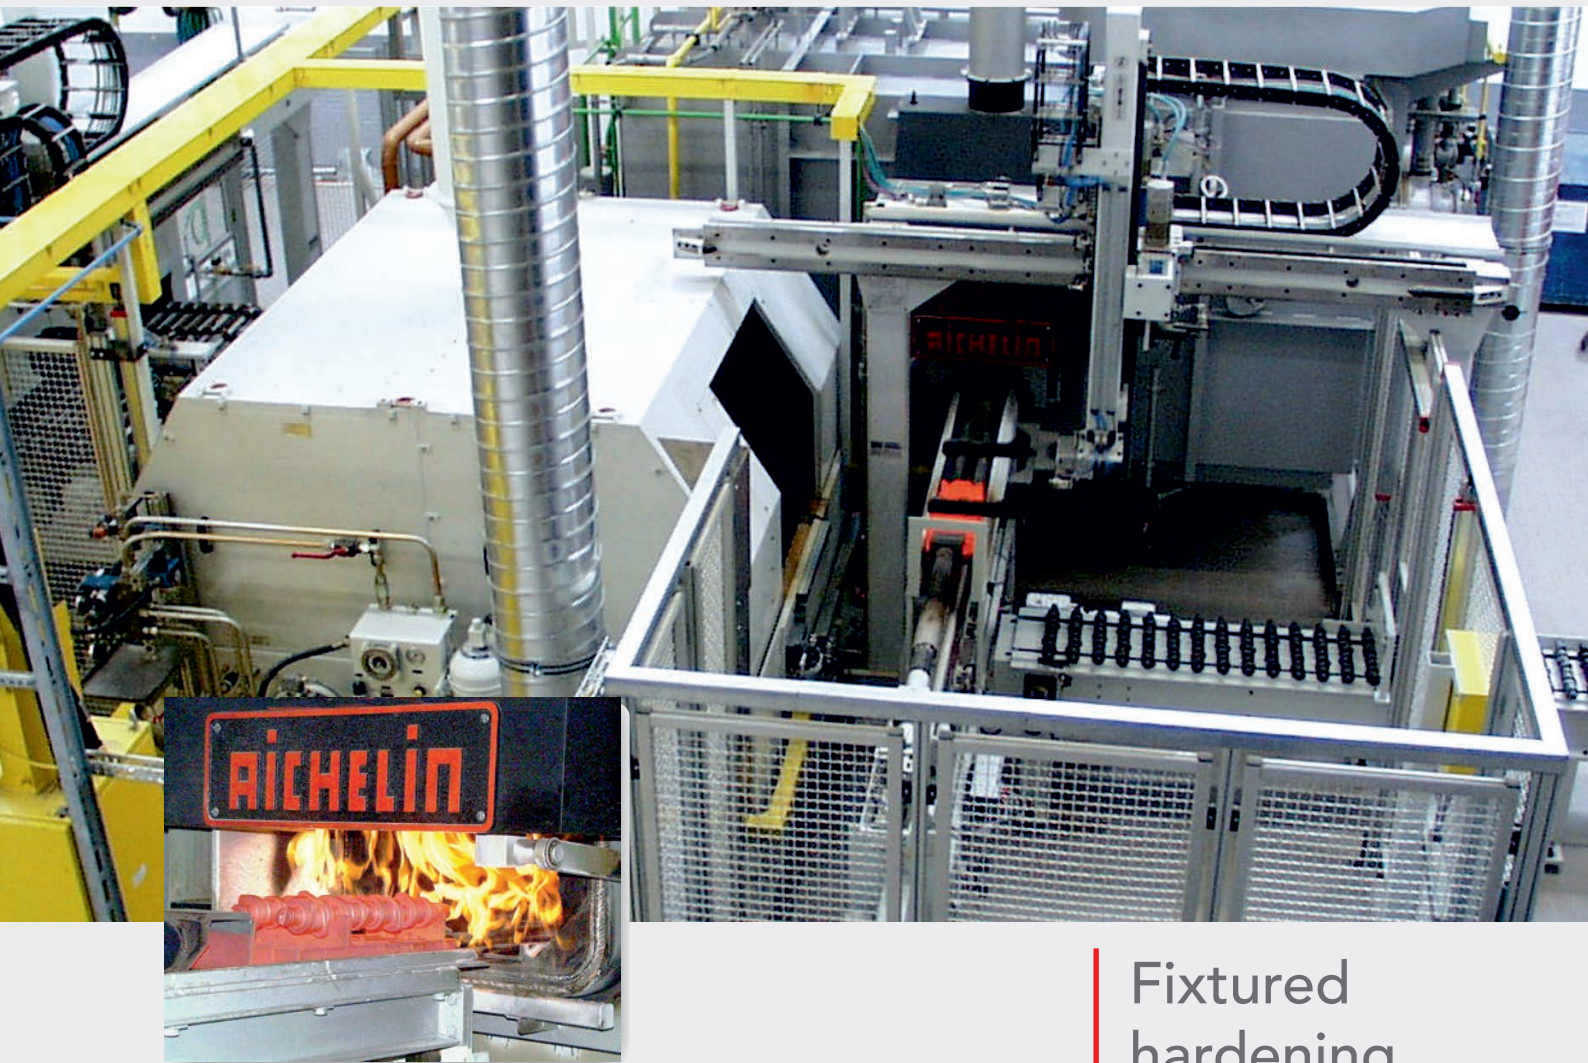

Fixtured  
hardening  
of  
car  
camshafts

## ► Technical data (execution example)


Capacity	100 camshafts / hour (à 4,2 kg)
Hearth diameter	3500 mm; 34 tray positions; 2 parts on tray
Working temperature	max. 950°C
Net heating-up capacity	max. 450 kg/hr
Heat treatment material	VW TL-4221 (16 MnCr 5)

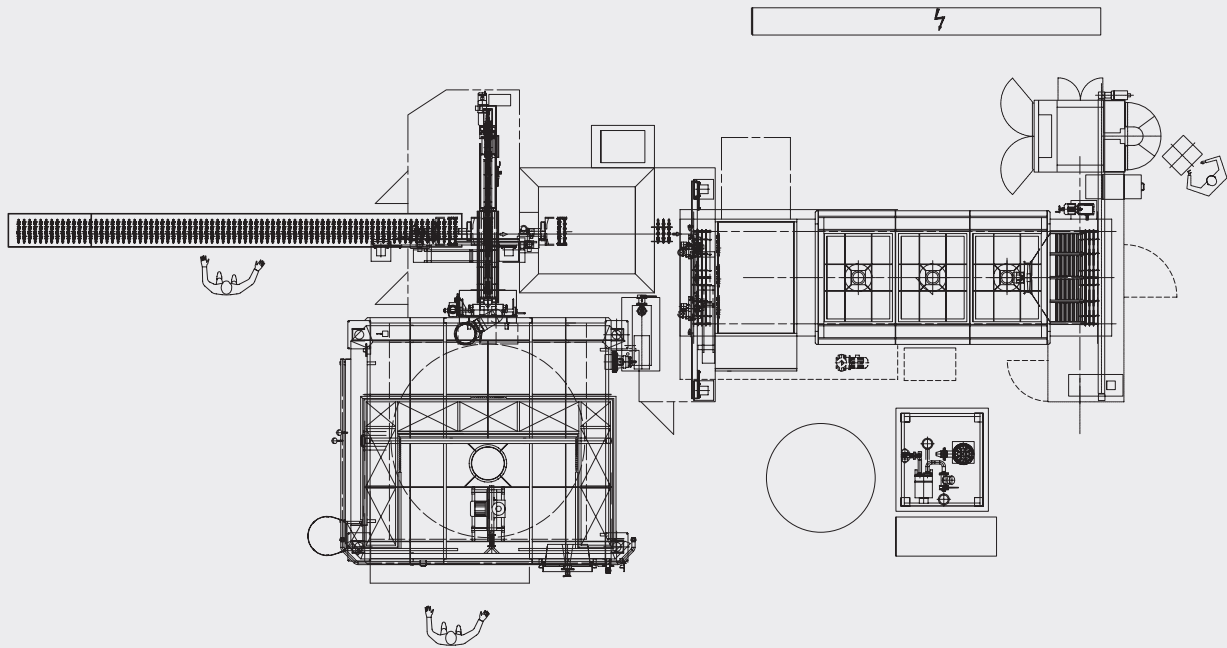

## ► Application purpose

With rotary-hearth furnace plants with fixture rotation hardening machine cam shafts in reproducible quality can be hardened economically for example in the automobile industry.

The here introduced entire plant executes (after preceded carburizing in the chamber furnace) following process steps: Austenitizing, fixtured hardening, post-washing, tempering in the belt furnace.

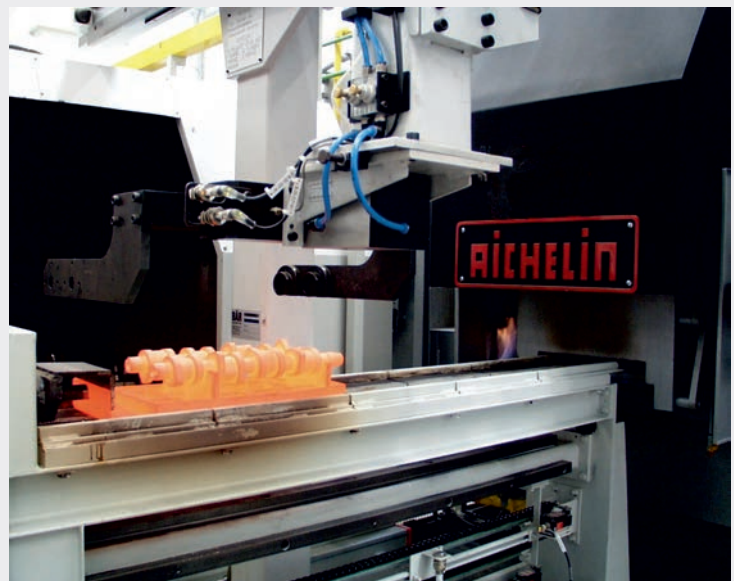

**AICHELIN Ges.m.b.H.**  
 Fabriksgasse 3  
 A - 2340 Mödling  
 Phone: +43 (2236) 23 646  
 Telefax: +43 (2236) 22 229  
 E-Mail: marketing@aichelin.at

**AICHELIN Service GmbH**  
 Schultheiß-Köhle-Strasse 7  
 D - 71636 Ludwigsburg  
 Phone: +49 (7141) 6437 - 0  
 Telefax: +49 (7141) 6437 - 100  
 E-Mail: info@aichelin.de

**NOXMAT GmbH**  
 Ringstraße 7  
 D - 09569 Oederan  
 Phone: +49 (37292) 65 03-0  
 Fax: +49 (37292) 65 03-29  
 E-Mail: info@noxmat.de

**EMA Indutec GmbH**  
 Petersbergstraße 9  
 D - 74909 Meckesheim  
 Phone: +49 (6226) 788 - 0  
 Telefax: +49 (6226) 788 - 100  
 E-Mail: info@ema-indutec.de